

S5 Series


- 5mmL, height, 1000-hours at 105°C



• SPECIFICATIONS

Items	Characteristics						
Category Temperature Range	- 40 to +105°C						
Rated Voltage Range	6.3v to 50Vdc						
Capacitance Tolerance	$\pm 20\%$ (M) (at 20°C ,120Hz)						
Leakage Current	$I=0.01CV$ or $3\mu A$, whichever is greater. Where, I :Max. Leakage current (μA). C: Nominal capacitance (μF). V :Rated voltage(V) (at 20°C , after 2 minutes)						
Dissipation Factor (tan δ)	Rated voltage (Vdc)	6.3V	10V	16V	25V	35V	50V
	tan δ (Max.)	0.25	0.19	0.16	0.14	0.12	0.10 (at 20°C ,120Hz)
Impedance ration max at 120Hz							
Low Temperature Characteristics	Working voltage	6.3v	10v	16v	25v	35v	50v
	Z-25°C/ Z+20°C	6	4	3	2	2	2
	Z-40°C/ Z+20°C	12	8	6	4	4	4
Load. Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the voltage is applied for 1000 hours at 105°C						
	Capacitance change	$\leq \pm 25\%$ of the initial value					
	DF (tan δ)	$\leq 200\%$ of the initial specified value					
	Leakage current	\leq The initial specified value					
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied.						
	Capacitance change	$\leq \pm 25\%$ of the initial value					
	DF (tan δ)	$\leq 200\%$ of the initial specified value					
	Leakage current	\leq The initial specified value					
Ripple Current Multiplier	Temperature coefficient						
	Temperature(°C)	~55	60	70	85	105	
	Factor	2.20	2.10	2.00	1.75	1.00	
	Frequency coefficient						
	cap freq	50	120	300	1K	10K~	
	~47	0.75	1.00	1.15	1.34	1.50	
	100~470	0.80	1.00	1.08	1.20	1.30	

• Diagram: (Unit: mm)

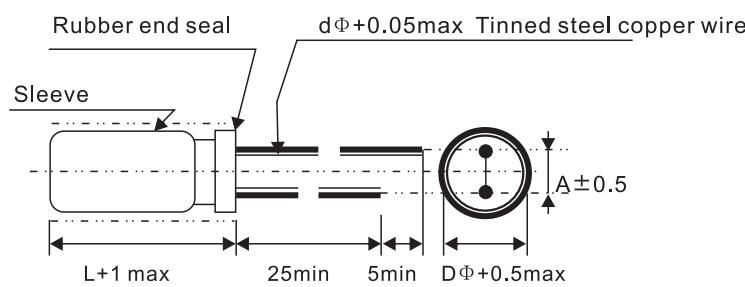

Body Dia ΦD	4	5	6
Lead Dia Φd	0.45	0.50	0.50
Lead Space A	1.5	2.0	2.5



富之餘電子實業股份有限公司

Fuhjyyu Electronic Industrial Co.,Ltd.

● STANDARD RATING

μF	Vdc	6.3	10	16	25	35	50	Chip Type SMD	Miniature Type	General Purpose	High Frequency Low Impedance	High Voltage High Reliability	Non-polar Type	Large Size Snap-in	Large Size Screw	X Metallized Polypropylene Film Capacitors
0.1											4*5	1.0				
0.22											4*5	2.0				
0.33											4*5	3.0				
0.47											4*5	4.0				
1.0											4*5	6.5				
2.2											4*5	8.5	4*5	10		
3.3								4*5	11	4*5	12	4*5	13			
4.7					4*5	14	4*5	13	4*5	18	5*5	20				
10			4*5	14	4*5	23	5*5	27	5*5	27	6.3*5	33				
22	4*5	21	5*5	28	5*5	30	6.3*5	42	6.3*5	46	6.3*5	46				
33	5*5	30	5*5	34	6.3*5	42	6.3*5	52	6.3*5	52						
47	5*5	36	6.3*5	43	6.3*5	48										
100	6.3*5	56	6.3*5	70	6.3*5	80										

Ripple Current : mA/rms at 120Hz 105°C